


RM 63

Special cleaner for parts cleaning powder

PRODUCT INFORMATION

Parts cleaning agent for cleaning of oil-, grease- and soot soiling

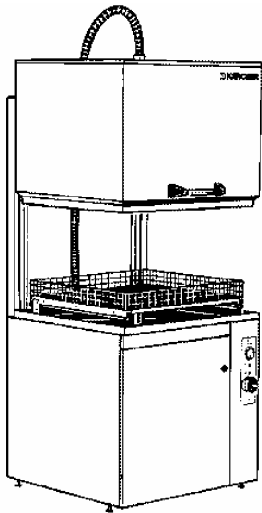

Properties:

- powdery cleaning and degreasing agent for metallic parts
- removes oil, grease and soot soiling
- low foaming
- free of nitrite, free of solvents
- pH 1% approx. 12,5
- white, pourable powder with characteristic odour

Fields of application:

- motor vehicle shops
- truck service station
- metal industry
- cleaning of repaired parts
- intermediate and final cleaning

Processing:

	premix	temperature
• parts cleaning machine	1+19	40-80°C

contact time: 1-5 min.

Productivity:

1 kg is sufficient for cleaning of approx. 12 charges (parts cleaning machine) at medium degree of soiling and a predilution of 1+19.

Handling:

stir powder into water

RM 63

Special cleaner for parts cleaning powder

PRODUCT INFORMATION

Remarks:

- for following surface treatment (laquering, galvanizing etc.) rinse parts with tap water
- do not use on alkali sensitive surfaces
- store RM 63 dry
- pay attention to local waste water introductory regulations

Attention:

C Corrosive; R 35 Causes severe burns

S 1/2 Keep locked up and out of the reach of children

S 20 When using do not eat or drink

S 22 Do not breathe dust

S 26 In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

S 36/37/39 Wear suitable protective clothing, gloves and eye/face protection

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible)

S 60 This material and its container must be disposed of as hazardous waste

Further information:

- Material safety data sheet